

GRAPHICS SHOWN ARE FOR REFERENCE ONLY.

GC TO PROVIDE ADA SIGNAGE PACKAGE AND INSTALL SIGNS AT LOCATIONS AND POSITIONS INDICATED IN PACKAGE OR AS REQUIRED BY LOCAL CODES. SIGNAGE PACKAGE SUPPLIED BY:


FRANKE/S2K 1-800-423-5247 www.frankesupply.com email: fs-frankesupply.us@franke.com

## SIGNAGE NOTES:

- 1. EACH EXIT DOOR SHALL HAVE A TACTILE SIGN, INCLUDING RAISED LETTERS AND BRAILLE, STATING 'EXIT' AND SHALL COMPLY WITH CHAPTER 7. ALL SIGNAGE SHALL CONFORM WITH ACCESSIBILITY GUIDELINES AND LOCAL GUIDELINES INCLUDING BUT NOT LIMITED TO PROPORTION, COLOR CONTRAST AND RELIEF AND GRADE 2 BRAILLE REQUIREMENTS.
- 2. WHEN PERMANENT IDENTIFICATION IS PROVIDED FOR ROOMS AND SPACES, RAISED LETTERS SHALL BE PROVIDED AND SHALL BE ACCOMPANIED BY BRAILLE IN CONFORMANCE WITH CHAPTER 7. SIGNS SHALL BE INSTALLED ON THE WALL ADJACENT TO THE LATCH SIDE OF THE DOOR. WHERE THERE IS NO WALL SPACE ON THE LATCH SIDE, INCLUDING AT DOUBLE LEAF DOORS, SIGNS SHALL BE PLACED ON THE NEAREST ADJACENT WALL, PREFERABLY ON THE RIGHT. MOUNTING HEIGHT SHALL BE 60" ABOVE THE FINISHED FLOOR TO THE CENTERLINE OF THE SIGN. MOUNTING LOCATION SHALL BE DETERMINED SO THAT A PERSON MAY APPROACH WITHIN 3" OF SIGNAGE WITHOUT ENCOUNTERING PROTRUDING OBJECTS OR STANDING



WITHIN THE SWING OF A DOOR.

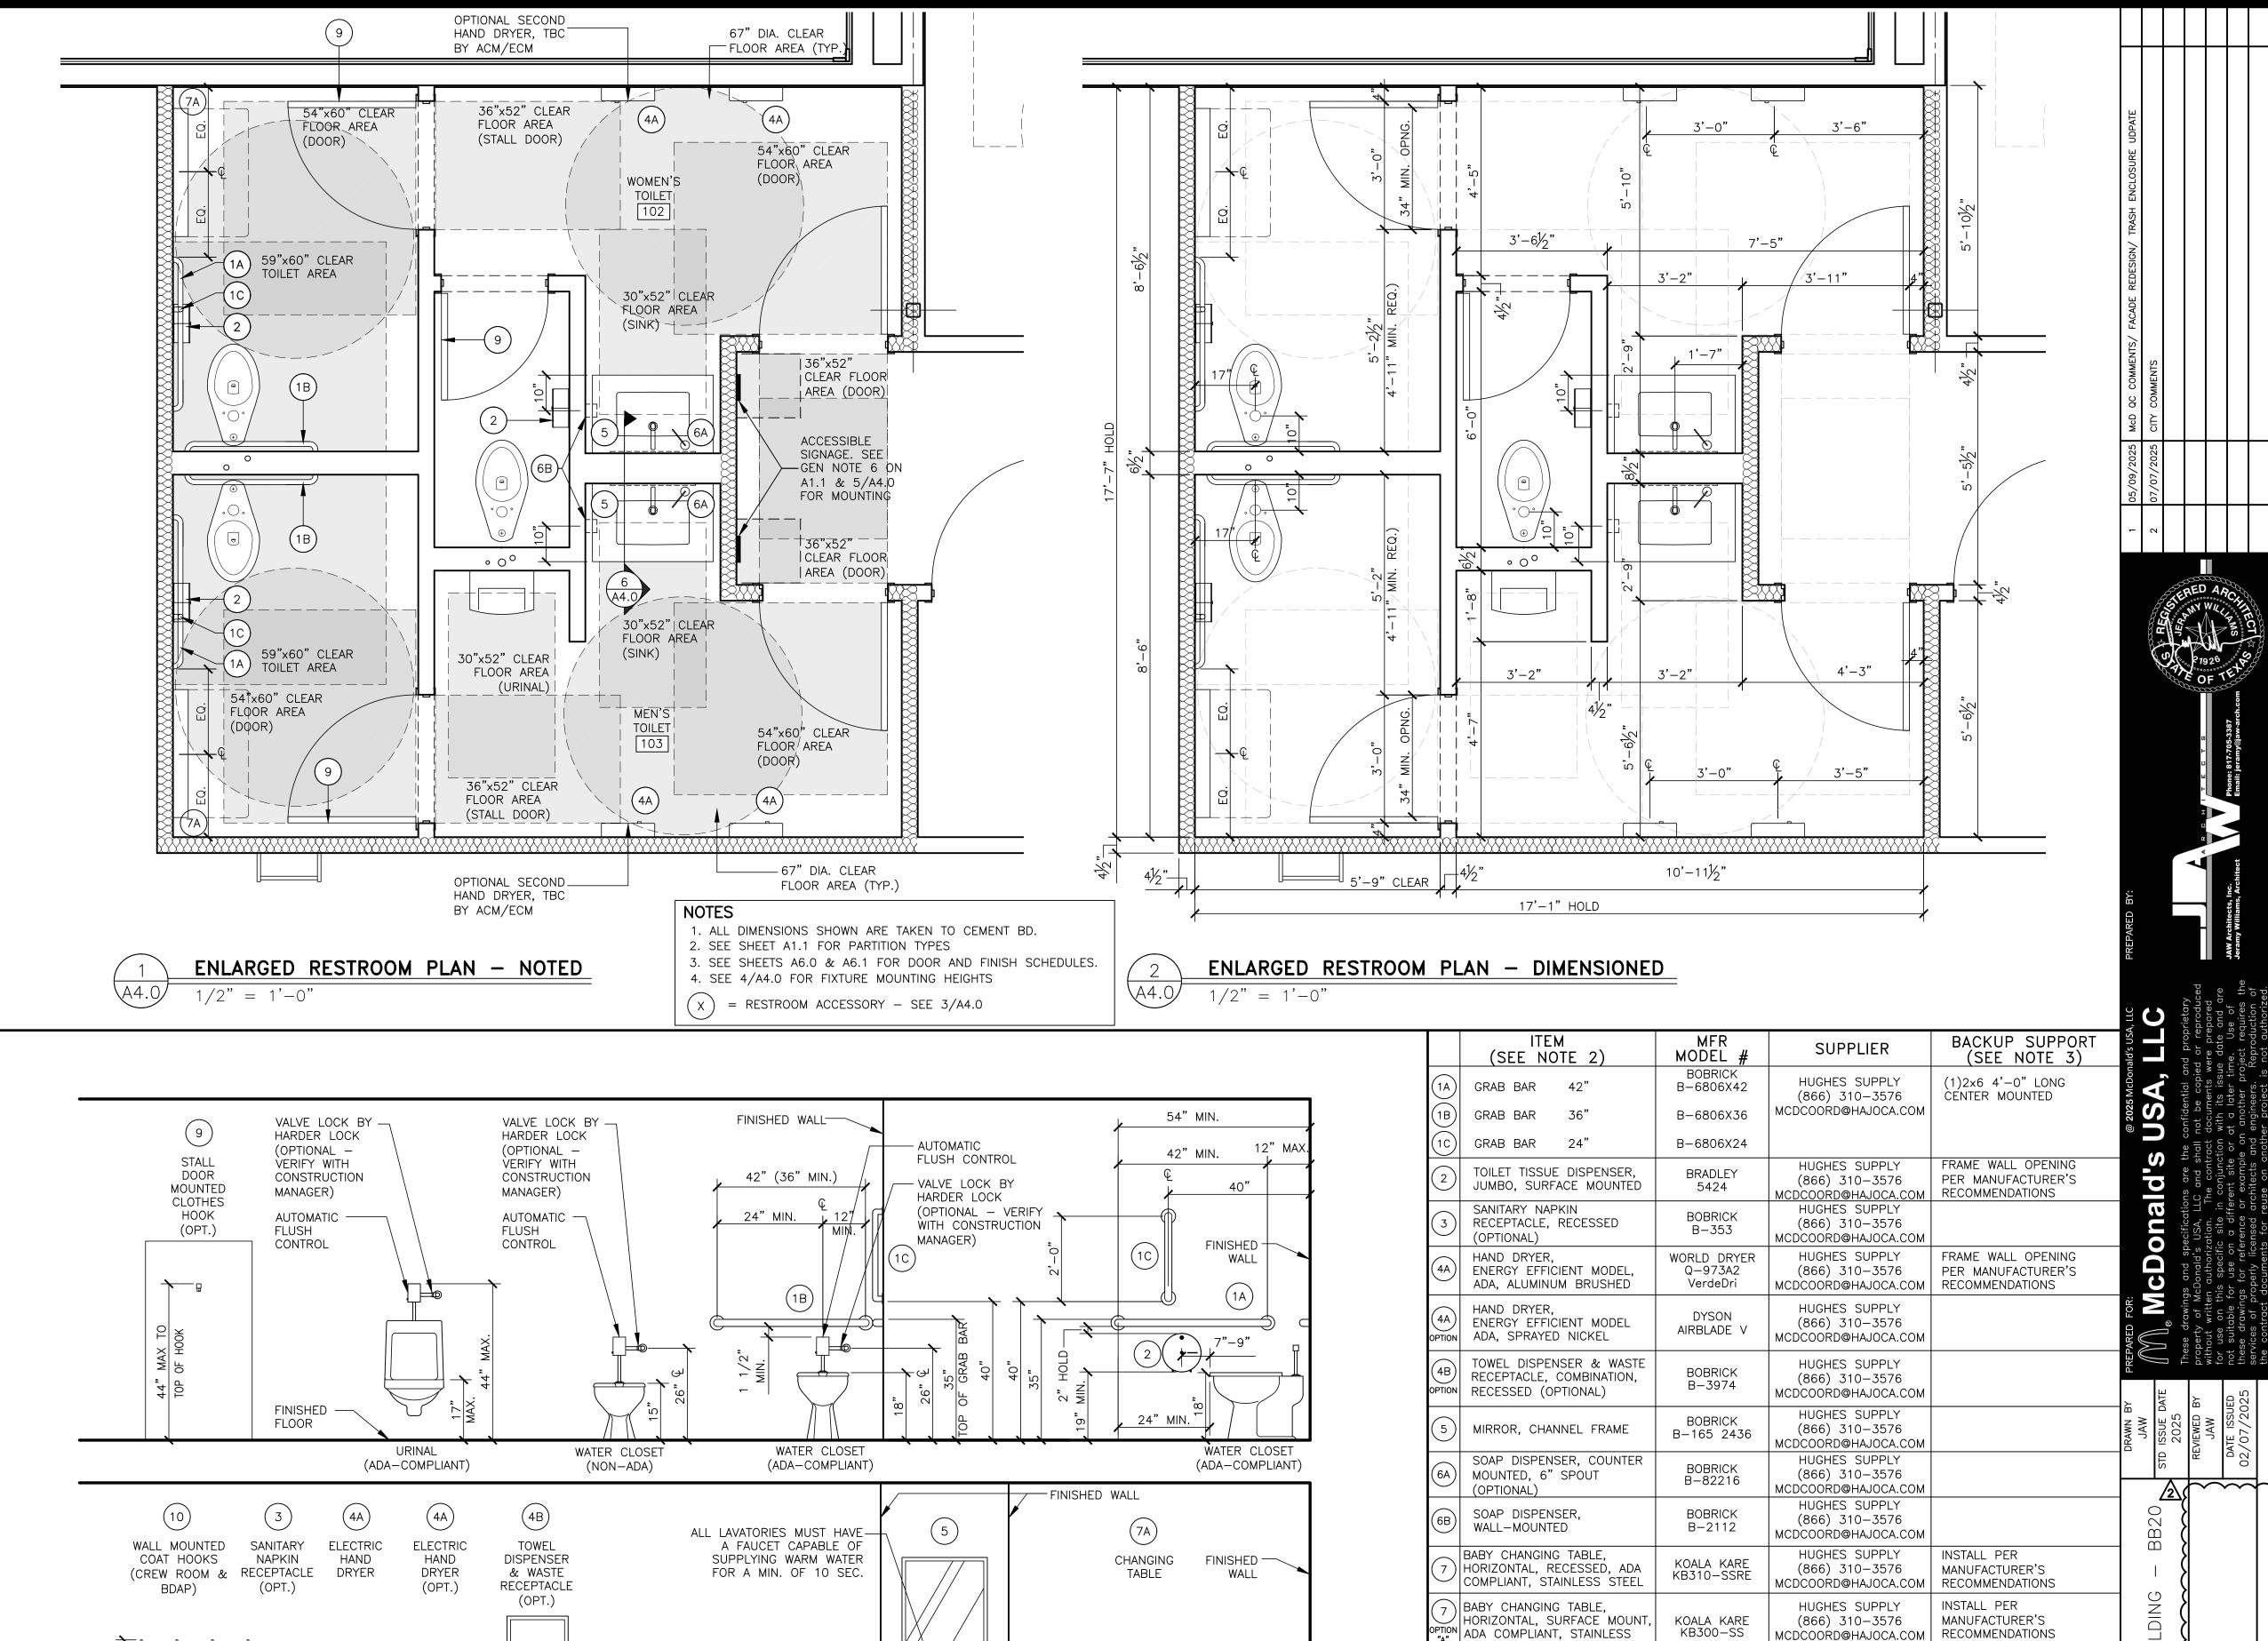

8 DIAPER CONTAINER (OPTIONAL)

1) SEE 4/A4.0 FOR ACCESSORY MOUNTING HEIGHTS

( 9 ) CLOTHES HOOK

(A4.0)

(19) (CREW ROOM & BDAP)

COAT RACK

BY OWNER

HUGHES SUPPLY

(866) 310-3576

MCDCOORD@HAJOCA.COM

HUGHES SUPPLY

(866) 310-3576

MCDCOORD@HAJOCA.COM

BRADLEY

917

BRADLEY

9944

2) SELECT ONE ITEM FROM ITEM GROUPS 4 & 6, VERIFY WITH AREA CONSTRUCTION MANAGER.

3) CUT BACK-UP SUPPORTS BETWEEN STUDS SO FACE OF SUPPORT IS FLUSH W/WALL STUD

RESTROOM ACCESSORY SCHEDULE

 $\overline{\mathbf{m}}$ 

JAWA 24-0221

RESTROOM PLAN

WALL-MTD SOAP DISP 6B

ADA-COMPLIANT

UNDERSINK PIPING

PROTECTION — SEE PLUMBING DRAWINGS

0

RESTROOM FIXTURE AND ACCESSORY ELEVATIONS

FINISHED FLOOR -

1/2" = 1'-0"